

10-13-00

A

In the United States Patent and Trademark Office

Applicants: Boggs et al. Docket No.: 13934.1
Filed: October 12, 2000
For: REGIONALLY DISTINCT NONWOVEN WEBS
Express Mail EL439720392US
Label No.:

JC920 U.S. PTO
09/689048
10/12/00

Transmittal Letter

**New Utility Patent Application under 37 C.F.R. 1.53(b)
Plural Inventors**

ASSISTANT COMMISSIONER FOR PATENTS

BOX PATENT APPLICATION

Washington, D.C. 20231

Dear Sir:

Transmitted herewith for filing is the above-identified new utility patent application.

Enclosed are:

1. This Transmittal Form including Fee Authorization and a duplicate for fee processing.
2. A Specification having a total of 17 pages, including a one (1) page Abstract and fifteen (15) claims.
3. One (1) sheet of drawings.
4. An unexecuted Combined Declaration and Power of Attorney.

Pursuant to 35 U.S.C. §120 and/or 35 U.S.C. 119(e), Applicants hereby claim priority from presently copending U.S. Provisional Application No. 60/159242 entitled "REGIONALLY DISTINCT NONWOVEN WEBS" and filed on October 13, 1999, in the names of Lavada C. Boggs et al.

Please preliminarily amend the specification of the present application by inserting, as the first sentence following the title, the following: --This application claims priority from presently copending U.S. Provisional Application No. 60/159242 filed on October 13, 1999, in the name of Lavada C. Boggs et al.--

The filing fee, pursuant to 37 C.F.R. 1.16(a), (b), (c) and (d), has been calculated as follows:

	Number Filed		Number Extra	Rate	Fee
Total Claims	15	-20 =	0	x 18 (fee code 103)=	
Independent Claims	1	-3 =	0	x 80 (fee code 102) =	
First Presentation of Multiple Dependent Claims				+ 270 (fee code 104) =	
				Base Fee (fee code 101)	\$710.00
				TOTAL	\$710.00

Please charge Kimberly-Clark Worldwide, Inc. deposit account number 11-0875 for (1) the filing fee indicated in the TOTAL above; and (2) any patent application processing fees required under 37 C.F.R. 1.17. In the event the filing fee indicated in the TOTAL above has been incorrectly calculated, please charge any additional filing fee or credit any excess in the filing fee to Kimberly-Clark Worldwide, Inc. deposit account number 11-0875.


Please address all correspondence to: Douglas H. Tulley, Jr., Kimberly-Clark Worldwide, Inc., Patent Department, 401 North Lake Street, Neenah, Wisconsin 54956.

The undersigned may be reached at telephone number 770-587-8617 or fax number 770-587-7327.

Respectfully submitted,

BOGGS ET AL.

By:



Douglas H. Tulley, Jr.

Registration No.: 34,743


EXPRESS MAIL CERTIFICATE

"Express Mail" label number: EL439720392US

Date of Deposit: October 12, 2000

I, Douglas H. Tulley, Jr., hereby certify that this document is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 C.F.R. 1.10 on the date indicated above and is addressed to the Assistant Commissioner for Patents, Box Patent Application, Washington, D.C. 20231.

By:



Douglas H. Tulley, Jr.

10/12/00

Date of Deposit: October 12, 2000

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office To Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231.

Douglas H. Tulley, Jr.

(Typed or printed name of person mailing paper or fee)



(Signature of person mailing paper or fee)

REGIONALLY DISTINCT NONWOVEN WEBS

FIELD OF THE INVENTION

5

The present invention relates to continuous filament nonwoven webs.

BACKGROUND OF THE INVENTION

10

There exist a variety of processes for forming continuous filament nonwoven webs. The spunbond fiber process is one example. Generally speaking, methods for making spunbond fiber nonwoven webs include extruding molten thermoplastic polymer through a spinneret and drawing the extruded polymer into filaments to form a web of randomly arrayed fibers on a collecting surface. As examples, methods for making the same are described in U.S. Pat. No. 4,692,618 to Dorschner et al., U.S. Pat. No. 4,340,563 to Appel et al. and U.S. Patent 3,802,817 to Matsuki et al. A second and distinct process for making continuous filament nonwoven webs is the meltblowing process. Meltblown fiber webs are generally formed by extruding a molten thermoplastic material through a plurality of fine die capillaries as molten threads or filaments into converging high velocity air streams which attenuate the filaments of molten thermoplastic material to reduce their diameter. Thereafter, the meltblown fibers are deposited on a collecting surface to form a web of randomly dispersed meltblown fibers. Meltblown fiber processes are disclosed in, by way of example only, U.S. Patent 3,849,241 to Butin et al., U.S. Patent No. 5,160,746 to Dodge et al., and U.S. Patent No. 4,526,733 to Lau.

15

20

25

Continuous filament nonwoven webs have found industrial applicability in a wide range of products and/or uses. As examples, continuous filament nonwoven webs have heretofore been used as filtration and/or barrier type materials such as in facemasks, sterilization wraps, HVAC media, surgical gowns, industrial workwear and so forth. Additionally, continuous filament nonwoven webs have been widely used as one or more components of personal care products. As examples, continuous filament nonwoven webs have been used in a variety of components ranging from liquid distribution layers, composite absorbent materials, baffles, coverstock and so forth. However, while continuous filament nonwovens have found wide acceptance within various industries the demands upon the physical attributes and/or performance of existing materials continues to increase. In addition, by improving the physical attributes and/or performance of continuous filament nonwoven materials the materials can be utilized in still a wider array of applications and products.

Thus, there exists a need for continuous filament nonwoven webs having improved and/or specialized physical attributes and functionality. More particularly, there exists a need for specialized continuous filament nonwoven webs having improved liquid handling properties, treatment retention and location, hand (i.e. softness), resiliency, durability, stretch-recovery and/or other desirable properties.

SUMMARY OF THE INVENTION

The aforesaid needs are fulfilled and the problems experienced by those skilled in the art overcome by nonwoven webs of the present invention comprising a unitary continuous filament nonwoven web comprising a composite of at least first and second continuous filaments. In one aspect of the present invention, the continuous filament nonwoven web can comprise a first region comprising first filaments and a second region comprising second filaments wherein the first and second filaments are different from one another. The first and second regions can extend adjacent one another in the machine direction. Further, the first and second filaments can be entangled or mixed adjacent the inter-face between the first and second region. In a further aspect of the invention, the composite nonwoven web can comprise a region of first continuous filaments, a region of second continuous filaments and a region of third continuous filaments each extending substantially continuously in the machine direction. The second region can thus be a discrete region positioned between the first and third regions. The second continuous

filaments are distinct from the first and third continuous filaments and the first and third filaments can be the same or different from one another.

BRIEF DESCRIPTION OF THE DRAWINGS

5

FIG. 1 is a partially elevated view of a composite nonwoven web having a first region of first fibers and a second region of second fibers.

FIG. 2 is a partially broken-away view of a composite nonwoven web having a first region of first fibers, a second region of second fibers and a third region of third
10 fibers.

FIG. 3 is a partially broken-away view of a multilayer nonwoven laminate incorporating a composite nonwoven web having a first region of first fibers and a second region of second fibers.

FIG. 4 is a cross-sectional view of a multilayer laminate comprising two
15 composite nonwoven webs of the present invention.

DEFINITIONS

As used herein and in the claims, the term "comprising" is inclusive or open-
20 ended and does not exclude additional unrecited elements, compositional components, or method steps.

As used herein the term "nonwoven" fabric or web means a web having a structure of individual fibers or threads which are interlaid, but not in an identifiable manner as in a knitted or woven fabric. Nonwoven fabrics or webs can be formed by
25 various processes including, but not limited to, meltblowing processes and spunbonding processes.

As used herein the term "spunbond fibers" refers to small diameter fibers of mechanically and/or eductively drawn polymeric material. Spunbond fibers are generally formed by extruding molten thermoplastic material as filaments from a
30 plurality of fine capillaries of a spinneret with the diameter of the extruded filaments then being rapidly reduced. Examples of spunbond fibers and methods of making the same are described in, by way of example only, U.S. Patent 4,340,563 to Appel et al., U.S. Patent 3,692,618 to Dorschner et al., U.S. Patent 3,802,817 to Matsuki et al., U.S. Patents 3,338,992 and 3,341,394 to Kinney, U.S. Patent 3,502,763 to Hartman, U.S.
35 Patent 3,542,615 to Dobo et al, U.S. Patent No. 5,382,400 to Pike et al., U.S. Patent No. 5,795,926 to Pike et al.; the entire content of the aforesaid patents are

incorporated herein by reference. Spunbond fibers are generally not tacky when they are deposited onto a collecting surface and are continuous.

As used herein the term "meltblown fibers" means fibers of polymeric material which are generally formed by extruding a molten thermoplastic material through a plurality of die capillaries as molten threads or filaments into converging high velocity air streams which attenuate the filaments of molten thermoplastic material to reduce their diameter. Thereafter, the meltblown fibers can be carried by the high velocity gas stream and are deposited on a collecting surface to form a web of randomly dispersed meltblown fibers. Meltblowing process are disclosed in, by way of example only, in U.S. Patent 3,849,241 to Butin et al. and U.S. Patent 5,271,883 to Timmons et al., U.S. Patent No. 5,160,746 to Dodge et al., U.S. Patent No. 4,526,733 to Lau, U.S. Patent No. 5,652,048 to Haynes et al., and U.S. Patent No. 5,366,793 to Fitts et al.; the entire contents of the aforesaid references are incorporated herein by reference. Meltblown fibers are generally smaller than about 10 microns in average diameter and, unlike spunbond fibers, are generally tacky when deposited onto a collecting surface, thereby bonding to one another during the deposition step.

As used herein, "ultrasonic bonding" means a process performed, for example, by passing the fabric between a sonic horn and anvil roll as illustrated in U.S. Patent 4,374,888 to Bornslaeger.

As used herein "point bonding" means bonding one or more layers of fabric at numerous small, discrete bond points. As an example, thermal point bonding generally involves passing one or more layers to be bonded between heated rolls such as, for example, an engraved patterned roll and a second roll. The engraved roll is patterned in some way so that the entire fabric is not bonded over its entire surface, and the second roll can be flat or patterned. As a result, various patterns for engraved rolls have been developed for functional as well as aesthetic reasons. One example of a pattern has diamond shaped points and is the Hansen Pennings or "H&P" pattern with about a 30% bond area and with about 200 bonds/square inch as taught in U.S. Patent 3,855,046 to Hansen et al.

As used herein, the term "autogenous bonding" refers to bonding between discrete parts and/or surfaces independently of mechanical fasteners or external additives such as adhesives, solders, and the like.

As used herein the term "wetting agent" refers to any chemical compound or composition that makes a fiber surface exhibit increased hydrophilic characteristics such as by lowering the contact angle of an aqueous fluid that comes in contact with the fiber surface.

DESCRIPTION OF THE INVENTION

In reference to FIG. 1, a nonwoven web 10 of continuous filaments can be provided wherein first filaments 12 are substantially located in first region 14 and second filaments 16 and substantially located in second region 18. First and second filaments 12, 14 are different from one another and can vary in numerous respects. By way of example only, the first and second filaments can vary with respect to average fiber size or denier, cross-sectional shape (e.g. round, crescent, multi-lobal, flat, etc.), cross-sectional configuration (e.g. monocomponent, multicomponent or multiconstituent), polymer composition, crimp level, addition or level of internal treatments or additives and so forth. First region 14 and second region 18, as well as the filaments forming the same, extend adjacent one another in the machine direction (MD). As used herein, the term "machine direction" or MD means the direction of the fabric in the direction in which it is produced. The term "cross machine direction" or CD means the direction of the fabric substantially perpendicular to the MD. The percent area (percent of the total area of the composite nonwoven web) of the first region and/or second region desirably ranges between about 98% to about 2% and more desirably between about 75% to about 25%. The nonwoven web is a single, continuous integrated structure wherein the distinct regions are attached to one another by the confluent or entangled relationship of the first and second continuous filaments proximate the areas where the first and second segments abut one another.

As one example, the first continuous filaments can comprise filaments having a smaller denier than the second continuous filaments. Desirably, the second continuous filaments have an average diameter at least about 5 micrometers larger than that of the first continuous filaments and still more desirably have an average diameter at least about 15 micrometers larger than that of the first continuous filaments. In one aspect, the first continuous filaments can have an average diameter of between about 0.1 and about 20 micrometers and the second continuous filaments have an average diameter between about 25 and about 150 micrometers. One or more of various methods can be used to achieve distinct fiber diameters. First, distinct fiber diameters can be achieved by employing different sized exit orifices or outlet openings in the spin plate or die body. Further, distinct fiber sizes can also be achieved using polymers in the first and second filaments that have significantly different melt-flow rates. In yet a further embodiment, the first or smaller diameter fibers can be solid fibers and the second or larger fibers can be hollow fibers. Hollow

fibers can be made by various methods known in the art such as, for example, by using a plurality of arced exit slots whereby swelling of the polymer after extrusion causes the molten polymer to form a fiber having a hollow center.

In a further aspect, the first filaments can comprise a different shape than those of the second region. As an example, the fibers of the first region can comprise round fibers and those of the second region can comprise a distinct cross-sectional shape such as, for example, a crescent shape, multilobal shape, ribbon shape as well as other geometric and/or non-geometric shapes. The regional variation in fiber size and/or shape can be achieved by employing a spinneret, die or spin plate having distinct outlet openings for the first and second continuous filaments. The respective outlet openings can have the shape necessary to achieve the desired cross-sectional shape and methods of extruding fibers having various shapes are known in the art such as, for example, those as described in U.S. Patent No. 5,707,735 to Midkiff et al., U.S. Patent No. 5,277,976 to Hogle et al., U.S. Patent No. 5,466,410 to Hills, U.S. Patent No. 5,069,970 and U.S. Patent No. 5,057,368 to Largman et al. Further, when using multicomponent filaments, varied and distinct fiber shaped can be achieved by splitting one or both of the first and second continuous filaments.

In a further aspect, the first and second filaments can comprise different polymer compositions. By providing filaments comprising distinct polymers it is possible to achieve a nonwoven web having regionally distinct properties whereby the first and second regions can have distinct tensile strengths, durability, elasticity, wettability, absorbency, three-dimensional web structure, porosity, density and/or other characteristics. The first and second filaments can be selected from thermoplastic polymers including, but not limited to, polyolefins (e.g., polypropylene and polyethylene), polycondensates (e.g., polyamides, polyesters, polycarbonates, and polyarylates), polyols, polydienes, polybutylenes, polyurethanes, polyethers, polyacrylates, polyacetals, polyimides, cellulose esters, polystyrenes, fluoropolymers and so forth. The particular polymer composition of the first and second filaments can be selected to achieve the desired physical attributes of the respective regions as well as that of the composite nonwoven web.

As an example, the first filaments can comprise an extensible filament of a first polymer and the second filaments can comprise an elastic filament of a second polymer having superior elastic recovery properties (relative to that of the first polymer). Suitable elastic filaments can comprise, by way of example only, elastic polyesters, polyurethanes, polystyrenes, polyolefins and so forth. Exemplary thermoplastic elastomers and/or elastomeric fibers suitable for use with the present invention include, but are not limited to, those described in U.S. Patent Nos. 5,332,613

to Taylor et al.; 4,803,117 to Daponte; 4,707,398 to Boggs et al.; 4,663,220 to Wisneski et al.; U.S. Patent Nos. 5,278,272 and 5,272,236 to Lai et al.; U.S. Patent No. 5,472,775 to Obijeski et al.; U.S. Patent No. 5,331,047 to Giacobbe et al.; and EP Patent No. 0400333B1. As one example, the first continuous filaments, comprising the first region, can comprise a polyolefin elastomer and the second continuous filaments, comprising the second region, can comprise a blend of a polyolefin and a polymer having improved elastic recovery properties such as, for example, KRATON polymer available from the Shell Chemical Company. KRATON polymers comprise a block copolymer having the general formula A-B-A' where A and A' are each a thermoplastic polymer endblock which contains a styrenic moiety such as a poly (vinyl arene) and where B is an elastomeric polymer midblock such as a conjugated diene or a lower alkene polymer.

As a further example, the first filaments can comprise a first polyolefin and the second filaments can comprise a second polyolefin. In this regard, the first filaments of the first region can comprise polypropylene and the second filaments of the second region can comprise a distinct blend or copolymer such as propylene-ethylene copolymers, propylene-butylene copolymers, KRATON/polypropylene blends and so forth. In addition, it is noted that there exist a wide variety of polymers having distinct characteristics and yet which comprise substantially similar and/or identical repeat units. For example, two polymers can each comprise substantial amounts of propylene and yet comprise different polymers for purposes of the present invention. Polymers having identical monomers or repeat units and distinct physical properties (e.g. melt-flow rates, polydispersity numbers, modulus of elasticity, melt-flow rates and so forth) can be achieved through the use of different synthesis steps and/or catalysts. Polyolefin polymers having varied physical attributes are described in U.S. Patent No. 5,300,365 to Ogale; U. S Patent No. 5,212,246 to Ogale; U.S. Patent No. 5,331,047 to Giacobbe; U.S. Patent No. 5,451,450 to Elderly et al.; U.S. Patent No. 5,204,429 to Kaminsky et al.; U.S. Patent No. 5,539,124 to Etherton et al.; U.S. Patent Nos. 5,278,272 and 5,272,236, both to Lai et al.; U.S. Patent No. 5,554,775 to Krishnamurti et al.; U.S. Patent No. 5,539,124 to Etherton et al.; European Patent No. 0475307B1 and European Application No. 0475306A1. As an example, the first filaments can comprise an inelastic or crystalline polypropylene polymer and the second filaments can comprise a stereoblock polymer. The term "stereoblock polymer" refers to polymeric materials with controlled regional tacticity or stereosequencing to achieve desired polymer crystallinity. By controlling the stereoregularity during polymerization, it is possible to achieve atactic-isotactic stereo blocks. Methods of forming polyolefin stereoblock polymers are known in the art and are described in the following articles:

G. Coates and R. Waymouth, "Oscillating Stereocontrol: A Strategy for the Synthesis of Thermoplastic Elastomeric Polypropylene" 267 Science 217-219 (January 1995); K. Wagener, "Oscillating Catalysts: A New Twist for Plastics" 267 Science 191 (January 1995). Stereoblock polymers and methods of their production are also described in

5 U.S. Patent No. 5,549,080 to Waymouth et al. and U.S. Patent No. 5,208,304 to Waymouth. By selectively controlling the crystallinity of alpha-olefins it is possible to provide different polymers exhibiting unique tensile modulus and/or elongation properties.

In a further aspect, the first or second filaments can comprise filaments having

10 improved (relative to the first filaments) wetting, wicking and/or absorbency characteristics in order to provide a nonwoven web having regions with distinct liquid handling properties. The improved liquid handling properties can be achieved by selecting a polymer for the first or second filaments that inherently has better wetting or absorbency characteristics than the polymer comprising the other filaments. Further,

15 first or second filaments can be provided having improved liquid handling properties by providing the selected filaments with treatments or additives designed to impart and/or improved liquid handling properties of the resulting filaments. Thus, by the latter method, the first and second filaments can comprise the same or similar polymers and yet have distinct liquid handling properties. Numerous additives and/or treatments for

20 imparting wettability to polyolefin fibers are known in the art. As one example, first continuous filaments can comprise polypropylene spunbond fibers and the second continuous filaments can comprise spunbond fibers comprising a blend of polypropylene and a di-fatty acid ester of polyethylene oxides, such blends are described in more detail in US patent No. 5,349,734 to Everhart et al. As further

25 examples, exemplary wetting agents that can be melt-processed within one of the segments in order to impart improved wettability to the fiber include, but are not limited to, ethoxylated silicone surfactants, ethoxylated hydrocarbon surfactants, ethoxylated fluorocarbon surfactants and so forth. In addition, exemplary chemistries useful in making melt-processed thermoplastic fibers more hydrophilic are described

30 in US Patent Nos. 3,973,068 and 4,070,218 to Weber et al., and US Patent No. 5,696,191 to Nohr et al.; the entire contents of the aforesaid references are incorporated herein by reference. The second region of such a composite nonwoven web will have superior wettability and/or liquid handling properties than the first region.

Thus, a composite nonwoven web can be provided having regionally distinct areas of

35 wettability. The regions can be selectively located within the composite nonwoven web, and in an absorbent article containing the same, in order to help direct fluids through the web in a desired manner.

In a further aspect, first and second filaments can comprise filaments having or including different treatments and/or additives and which therefore result in filaments and regions with distinct physical attributes. Various fiber treatments and/or additives are known in the art and can be used to improve and/or impart desired physical attributes to filaments such as, for example, UV stability, liquid handling properties, flame-retardancy, anti-static properties, odor control properties, anti-bacterial properties and so forth. These and other treatments and/or additives can be selectively added to the first and/or second filaments such that the first and second regions have distinct physical attributes.

In a further aspect of the invention, the first filaments can comprise monocomponent fibers and the filaments of the second region can comprise multiconstituent or multicomponent filaments. Still further, the first and second filaments can each comprise multicomponent and/or multiconstituent filaments that are different from one another. The multicomponent fibers can have any one of various configurations such as, for example, side-by-side, concentric sheath/core, eccentric sheath/core, islands-in-sea and so forth. Multicomponent fibers, including bicomponent fibers, and methods of making the same are known in the art and, by way of example only, are generally described in U.S. Patent 5,108,820 to Kaneko et al., U.S. Patent 4,795,668 to Krueger et al., U.S. Patent 5,382,400 to Pike et al., U.S. Patents 5,277,976 to Hogle et al., U.S. Patent 5,466,410 to Hills, U.S. Patent No. 5,534,339 to Stokes et al., and PCT application WO97/49848 to Griesbach. In one embodiment, the filaments of the first region can comprise monocomponent polyolefin fibers and the second region can comprise multicomponent filaments wherein at least one of the components comprises a polyolefin exposed upon a portion of the outer surface of the fiber. As a particular example, the monocomponent filaments of the first region can comprise polypropylene and the multicomponent filaments of the second region can comprise side-by-side bicomponent fibers where one component comprises polypropylene such as, for example, a polyethylene/polypropylene bicomponent filament. In a further embodiment, the first filaments can comprise elastic filaments and the second filaments can comprise highly crimped multicomponent filaments whereby the composite nonwoven web exhibits good stretch and recovery properties in the MD. In this regard, the crimped filaments of one region can be extended by pulling out the crimp and the elastic filaments of the other region provide sufficient recovery properties to cause the entire web to retract after the elongating force is removed.

As a further example, the continuous filaments of the first region can comprise a first multicomponent fiber and the continuous filaments of the second region can

comprise distinct multicomponent fibers. In this regard the multicomponent fibers can vary with respect to polymer composition of one or more components and/or crimp level to provide a composite nonwoven web having regions with varied densities, porosity, and/or air permeability. Notably, by varying the shape, polymers, volume percentages of respective components, and additives, the nonwoven web can be formed having both varied crimp levels and therefore varied web densities. These particular attributes can be varied to provide a nonwoven web with unique and regionally distinct fluid handling properties, air permeability and/or filtration properties. In addition, use of multicomponent fibers also allows for autogenous bonding of the web. In one aspect, the multicomponent filaments of the first region and the multicomponent filament of the second region desirably each comprise at least one polyolefin component and still more desirably each comprise a similar and/or identical polyolefin component. In a particular example, the first region can comprise polyethylene/polypropylene side-by-side filaments and the second region can comprise polyethylene/polyamide side-by-side filaments. In a further particular embodiment, the first region can comprise polyethylene/nylon side-by-side filaments and the second region can comprise polyethylene/nylon sheath/core filaments wherein the polyethylene comprises the sheath component.

The continuous filament nonwoven webs can be prepared utilizing conventional web forming processes that have been modified as described herein. As examples, both spunbond processes and meltblown processes can be used in conjunction with the present invention. Regional fibers of distinct polymer composition can be achieved by modifying conventional spin pack assemblies. Spin packs generally comprise a series of stacked plates that have a pattern of interconnecting channels and/or apertures through which multiple polymer streams can flow. The polymer streams are maintained separate as the respective polymer streams flow throughout the spin pack to the distribution plate, spinneret and/or die capillary. Examples of such spin packs are described in US Patent No. 5,344,297 to Hills, U.S. Patent No. 5,466,410 to Hills, U.S. Patent No. 5,853,635 to Morell et al. and U.S. Patent Application No. 08/955,719 to Cook; the entire contents of each of the aforesaid references are incorporated herein by reference. Conventional spin packs can be modified to deliver the respective polymer streams to the desired outlet openings within the spin plate or spinneret. In addition, distinct first and second regions can be achieved by merging separate spunbond fiber streams, prior to web laydown, to create a single coflowing filament stream upon exit from the fiber draw unit. By merging the filaments prior to web laydown, the resulting composite web can have an area where the first and second filaments become mixed, i.e. where the first and second regions

partially overlap. Thus, the first and second regions become and/or can be bonded such that the interface between the first and second regions is substantially similar to the appearance and/or structure of that of the first and/or second regions. This allows formation of a unitary composite nonwoven web without the need to fixedly
 5 attach the two regions by external means such as would be required by simply seaming, stitch bonding, adhesively bonding two separate nonwoven webs together. In addition, after fiber laydown and formation of the web, the composite nonwoven web can be further acted upon and/or processed as desired. As an example, the entire web can be bonded to form a durable, integrated web. The unitary nonwoven
 10 web can be thermally point bonded and/or through-air bonded as desired in order to impart additional integrity thereto.

In a further aspect, the unitary nonwoven web can have multiple regions of distinct filaments. In reference to FIG. 2, nonwoven web 30 can comprise first region 32 of first filaments 34, second region 36 of second filaments 38, and third region 40 of
 15 third filaments 42. First filaments 34 and second filaments 38 comprise different filaments and third filaments 42 and second filaments 38 comprise different filaments. First filaments 34 and third filaments 42 can either be the same or different from one another. Thus, it is possible to provide a nonwoven web of continuous filaments having discrete regions with disparate physical and/or functional characteristics within
 20 the MD of a unitary nonwoven web as desired. In one embodiment, the first and third regions can comprise substantially similar or identical filaments. Desirably the first, second and/or third regions each comprise at least about 2% of the total area of the composite nonwoven web and more desirably comprise between about 90% and about 5% of the total area of the nonwoven web. In this regard, often the polymer having the
 25 improved physical characteristics comprises a more expensive polymer. Thus, in such instances the size and/or frequency of the region utilizing the expensive component can be tailored so as to achieve the desired web properties while comprising a minimal area of the web. In addition, the individual regions can alternate such that the composite nonwoven web comprises multiple series of distinct regions.

30 The composite nonwoven webs of the present invention can be used alone or in combination with other layers or materials. In this regard, it may often be desirable to incorporate the nonwoven webs of the present invention within a multilayer laminate structure. As used herein "multilayer laminate" simply refers to a multilayer structure wherein two or more layers are fixedly attached to one another in
 35 a face-to-face relationship. One or more nonwoven webs of the present invention can be laminated to one or more additional layers or materials such as, for example, films, knitted or woven fabrics, foams, scrims, nonwoven fabrics, cellulosic materials

and so forth. The multiple layers can be fixedly attached by one or means known in the art such as ultrasonically, thermally or adhesively attaching the layers. In a particular aspect the respective layers can each comprise thermoplastic polymers and can be thermally point bonded to form an integrated multilayer laminate. In one

5 embodiment, a nonwoven web of the present invention can be bonded to one or more additional nonwoven fabrics to form a multi-layer nonwoven laminate. As a particular example and in reference to FIG. 3, homogeneous nonwoven web 20 is bonded to composite nonwoven web 10 which comprises first region 14 of first continuous filaments 12 and second region of second continuous filaments 16. The

10 homogeneous nonwoven web 20 and the composite nonwoven web 10 can be bonded at discrete points 22 by thermal point bonding. Exemplary multilayer nonwoven laminates include, by way of example only, those wherein the outer layers comprise a spunbond web and the interior layer comprises a meltblown web; e.g. a spunbond/meltblown/spunbond (SMS) laminate. Exemplary multilayer laminates and

15 methods of making the same are disclosed in U.S. Patent 4,041,203 to Brock et al., U.S. Patent 5,188,885 to Timmons et al., and U.S. Patent No. 5,695,868 to McCormack. Multilayer laminates can be made by sequentially depositing onto a moving forming belt a first fabric layer, then a second layer and then bonding the laminate such as by thermal point bonding as described herein. Alternatively, the

20 individual fabric layers may be made individually, collected in rolls, and combined in a separate bonding step.

The composite nonwoven fabrics of the present invention, and laminates thereof, can be utilized for or as a component in garments such as industrial workwear, undergarments, pants, shirts, jackets, gloves, socks, etc. as well as in infection control

25 products such as surgical gowns and drapes, face masks, head coverings, shoe coverings, wound dressings, bandages, sterilization wraps, wipers, patient bedding and so forth. Still further, composite nonwoven fabrics of the present invention, and laminates thereof, can be utilized in one or more aspects as a component of a personal care product, e.g. personal hygiene oriented items such as diapers, training pants,

30 absorbent underpants, adult incontinence products, feminine hygiene products, and the like. As specific non-limiting examples thereof, the composite nonwoven webs and/or laminates thereof can be used in conjunction with or in a manner as described in the following references: U.S. Patent No. 4,965,122 to Morman et al.; U.S. Patent No. 5,336,545 to Morman et al.; U.S. Patent No. 4,720,415 to Vander Wielen et al.;

35 U.S. Patent No. 5,540,976 to Shawver et al.; U.S. Patent No. 3,949,128 to Ostermeier; U.S. Patent No. 5,620,779 to Levy et al.; U.S. Patent No. 5,714,107 to Levy et al., U.S. Patent No. 5,188,885 to Timmons et al., U.S. Patent No. 5,759,926 to Pike et al.; U.S.

Patent No. 5,721,180 to Pike et al.; U.S. Patent No. 5,817,584 to Singer et al.; U.S. Patent No. 5,639,541 and U.S. Patent No. 5,811,178 to Adam et al.; U.S. Patent 5,385,775 to Wright et al; U.S. Patent No. 4,853,281 to Win et al.; U.S. Patent No. 4,833,003 to Win et al.; U.S. Patent No. 5,486,166 to Bishop et al.; and U.S. Patent
5 No. 5,562,650 Everett et al. The aforesaid list of applications of the composite nonwoven webs and laminates thereof is not exhaustive and there exist numerous additional uses for the fabrics of the present invention.

Further, multiple layers of nonwoven webs of the present invention can themselves be bonded together to form multilayer laminates. As an example and in
10 reference to FIG. 4, first composite nonwoven web 51 is bonded to second composite nonwoven web 56 thereby forming laminate 50. First composite nonwoven web 51 can comprise first regions 52 of first fibers and second region 54 of second fibers. Second composite nonwoven web 56 can comprise first regions 58 of first fibers and second region 60 of second fibers. The corresponding fibers in the
15 first and second regions of the first and second composite nonwoven webs can be the same and/or different from those in the other layer.

While numerous ranges have been provided herein, it is intended that each and every sub-range between the express ranges provided likewise be included within the teachings of the present invention. As an example, a stated range of between 1 and 5
20 would therefore be understood to also include all sub-ranges, namely 1-4, 1-3, 1-2, 2-5, 2-4, 2-3 and so forth. In addition, while various patents and other reference materials have been incorporated herein by reference, to the extent there is any inconsistency between incorporated material and that of the written specification, the written specification shall control.

25 In addition, while the invention has been described in detail with respect to specific embodiments thereof, it will be apparent to those skilled in the art that various alterations, modifications and other changes may be made to the invention without departing from the spirit and scope of the present invention. It is therefore intended that the claims cover all such modifications, alterations and other changes
30 encompassed by the appended claims.

We claim:

- 5 1. A composite nonwoven web comprising:
 - a nonwoven web having a machine-direction and a cross-direction and comprising a first segment and a second segment wherein said first and second segments extend adjacent one another in said machine direction;
 - said first segments comprising first continuous filaments and wherein said first
 - 10 continuous filaments comprise an elastomer;
 - said second segments comprising second continuous filaments and wherein the second continuous filaments are different from the first continuous filaments; and
 - wherein said first continuous filaments proximate said second region and said second continuous filaments proximate said first region are in a confluent
 - 15 relationship with one another and form a unitary nonwoven web.
2. The composite nonwoven web of claim 1 wherein said second continuous filaments comprise an inelastic polymer.
- 20 3. The composite nonwoven web of claim 2 wherein the area of said first segment comprises between about 75% and about 25% of the total area of the composite nonwoven web.
4. The composite nonwoven web of claim 2 wherein said second continuous
- 25 filaments comprise an olefin polymer.
5. The composite nonwoven web of claim 4 wherein said first continuous filaments comprise an elastic olefin polymer.
- 30 6. The composite nonwoven web of claim 4 wherein said first continuous filaments comprise an elastomer selected from the group consisting of polyesters, polyurethanes, polystyrenes and polyolefins.
7. The composite nonwoven web of claim 4 wherein said first continuous filaments
- 35 comprise a blend of a polyolefin and a block copolymer having a styrenic moiety blocks and elastomeric polymer mid-blocks.

8. The composite nonwoven web of claim 1 wherein said nonwoven web is selected from the group consisting of spunbond and meltblown fiber webs.

5 9. The composite nonwoven web of claim 8 further comprising a third region adjacent said first region, said third region comprises third continuous filaments the same as the second continuous filaments and wherein said first continuous filaments proximate said third region and said third continuous filaments proximate said first region are in a confluent relationship with one another and form a unitary composite
10 nonwoven web.

10. The composite nonwoven web of claim 9 wherein said first continuous filaments comprise a first olefin polymer and said second and third continuous filaments comprise a second olefin polymer and wherein said first olefin polymer has a higher
15 modulus of elasticity than said second olefin polymer.

11. A composite nonwoven web comprising:
a nonwoven web having a machine-direction and a cross-direction and comprising a first segment and a second segment wherein said first and second
20 segments extend adjacent one another in said machine direction;
said first segments comprising first continuous filaments and wherein said first continuous filaments are hydrophobic;
said second segments comprising second continuous filaments and wherein the second continuous filaments are hydrophilic; and
25 wherein said first continuous filaments proximate said second region and said second continuous filaments proximate said first region are in a confluent relationship with one another and form a unitary nonwoven web.

12. The composite nonwoven web of claim 11 wherein said second continuous
30 filaments contain a wetting agent.

13. The composite nonwoven web of claim 12 further comprising a third region and wherein said third region is adjacent said second region, said third region comprises third continuous hydrophobic filaments and wherein said second continuous
35 filaments proximate said third region and said third continuous filaments proximate said second region are in a confluent relationship with one another and form a unitary composite nonwoven web.





14. The composite nonwoven web of claim 13 wherein said second continuous
filaments comprise a propylene polymer and an ethoxylated compound and further
wherein said first and third continuous filaments consist essentially of a propylene
5 polymer.

15. The composite nonwoven web of Claim 11 wherein the second region is more
porous than said first region.

11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211
2212
2213
2214
2215
2216
2217
221

ABSTRACT

Composite nonwoven webs are provided having two distinct regions extending adjacent one another in the machine direction of the web; the first region is formed from first continuous filaments and the second region is formed from second continuous filaments. The interface of the first and second region is formed from a mixture the first and second continuous filaments in a confluent relationship with one another and such that the two distinct regions form a unitary nonwoven web. The respective first and second regions can have distinct physical attributes as a result of utilizing first and second filaments which are different from one another. The first and second continuous filaments can vary with respect to average fiber denier, cross-sectional shape, cross-sectional configuration, polymer composition, crimp level, and additive composition.

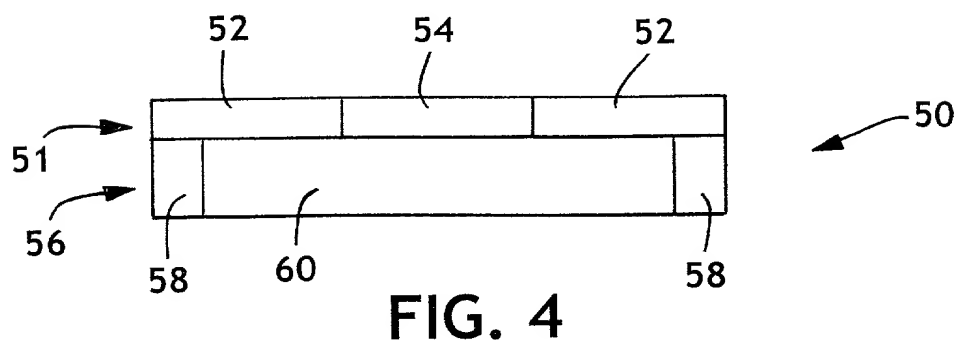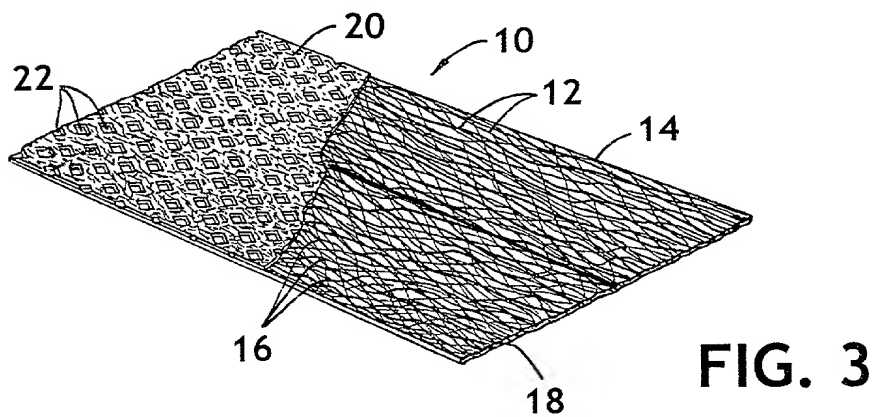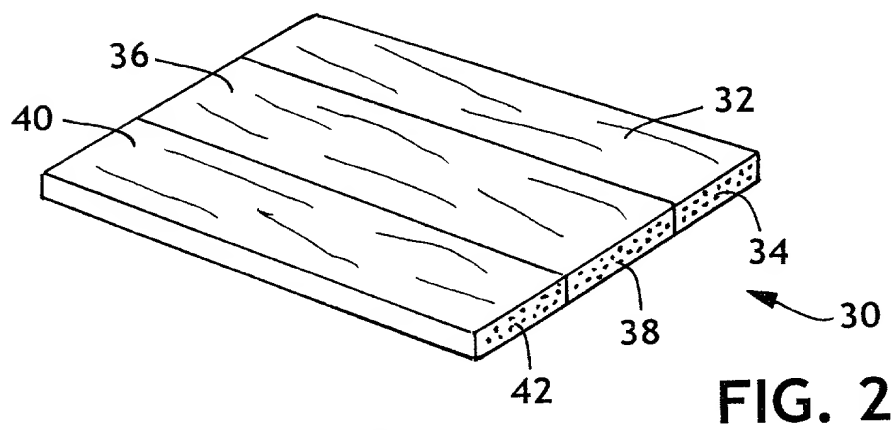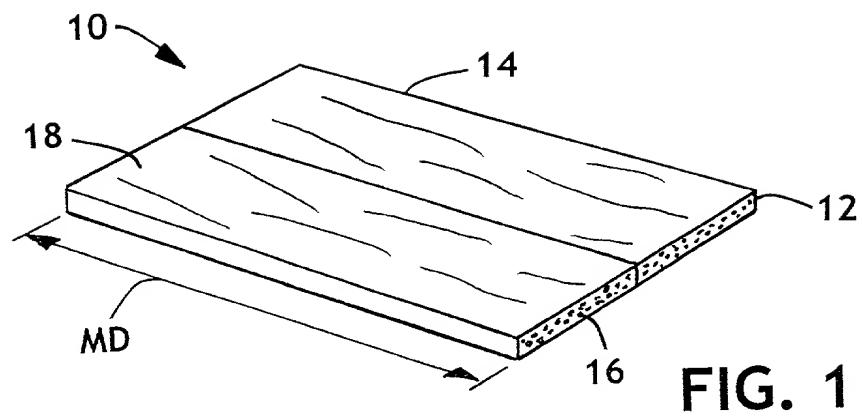

In the United States Patent and Trademark Office

Applicants: Boggs et al. Docket No.: 13934.1
Serial No.: Group:
Filed: October 12, 2000 Examiner:
For: REGIONALLY DISTINCT NONWOVEN WEBS

Express Mail EL439720392US

Combined Declaration and Power of Attorney Original U.S. Patent Application Joint Inventors

ASSISTANT COMMISSIONER FOR PATENTS
Washington, D.C. 20231

Sir:

As the below-named inventors, we hereby declare that:

Our respective residence addresses, post office addresses and citizenship designations are as stated below, next to our names.

We believe that we are the original, first and joint inventors of the subject matter which is claimed and for which a patent is sought in the patent application entitled:

REGIONALLY DISTINCT NONWOVEN WEBS

the specification of which is attached hereto.

We hereby state that each of us has reviewed and understands the contents of the above-identified specification, including the claims and any accompanying drawings as amended by any amendment specifically referred to in the oath or declaration.

We acknowledge our duty to disclose all information which is material to the patentability of this application as defined by 37, C.F.R. 1.56.

We hereby claim the benefit under 35 U.S.C. section 119(E) of any United States provisional application listed below.

60/159242 – Application Number

October 13, 1999 – Filing Date

As the named inventors, we hereby appoint the following attorneys and/or agents to prosecute this application and transact all business in the U.S. Patent and Trademark Office connected herewith:

Michael J. Bendel, Reg. No. 39605; Patricia A. Charlier, Reg. No. 38840; Thomas J. Connelly, Reg. No. 28404; Gregory E. Croft, Reg. No. 27542; Jeffrey B. Curtin, Reg. No. 37601; Alyssa A. Dudkowski, Reg. No. 40596; Jeremiah J. Duggan, Reg. No. 24470; Steven D. Flack, Reg. No. 40608; Thomas M. Gage, Reg. No. 33385; Scott B. Garrison, Reg. No. 39,198; Joseph P. Harps, Reg. No. 28854; William D. Herrick, Reg. No. 25468; Kyle K. Kappes, Reg. No. 34846; John P. Kirby, Jr., Reg. No. 25348; Nancy M. Klembus, Reg. No. 40051; Christos S. Kyriakou, Reg. No. 42776; Nicholas N. Leach, Reg. No. 31776; William W. Letson, Reg. No. 42797; Thomas J. Mielke, Reg. No. 31399; Douglas L. Miller, Reg. No. 30406; Thomas M. Parker, Reg. No. 42063; Sebastian C. Pugliese III, Reg. No. 42091; James B. Robinson, Reg. No. 34912; Karl V. Sidor, Reg. No. 32597; Douglas H. Tulley, Reg. No. 34743; Patrick C. Wilson, Reg. No. 31893; and Paul Y. Yee, Reg. No. 29460.

Please send all correspondence to Douglas H. Tulley, Jr., Kimberly-Clark Worldwide, Inc., 401 North Lake Street, Neenah, Wisconsin 54956.

Our representative may be reached at: 770-587-8617.

We hereby declare that:

1. All statements made herein of our own knowledge are true and that all statements made on information and belief are believed to be true; and
2. These statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of this application or any patent issued thereon.

First Named Inventor's Full Name:

Lavada Campbell Boggs

First Named Inventor's Signature: _____

Date of Execution of this Document by First Named Inventor: _____

Date: _____

First Named Inventor's Country of Citizenship:

United States of America

First Named Inventor's Residence Address:

2639 Spencer Trace,

Marietta, GA 30062

First Named Inventor's Post Office Address:

Same as Residence Address

Second Named Inventor's Full Name:

Kevin George Hetzler

Second Named Inventor's Signature: _____

Date of Execution of this Document by Second Named Inventor: _____

Date: _____

Second Named Inventor's Country of Citizenship:

United States of America

Second Named Inventor's Residence Address:

20 Boulder Ridge Crossing

Sparta, NJ 07871

Second Named Inventor's Post Office Address:

Same as Residence Address

Third Named Inventor's Full Name:

Glen Thomas Mildenhall

Third Named Inventor's Signature: _____

Date of Execution of this Document by Third Named Inventor: _____

Date: _____

Third Named Inventor's Country of Citizenship:

United States of America

Third Named Inventor's Residence Address:

3044 Wendmead Place

Marietta, GA 30062

Third Named Inventor's Post Office Address:

Same as Residence Address

Fourth Named Inventor's Full Name:

Michael Tod Morman

Fourth Named Inventor's Signature:

Date of Execution of this Document by Fourth Named Inventor:

Date: _____

Fourth Named Inventor's Country of Citizenship:

United States of America

Fourth Named Inventor's Residence Address:

555 Kings Peak

Alpharetta, GA 30201

Fourth Named Inventor's Post Office Address:

Same as Residence Address

Fifth Named Inventor's Full Name:

Dan Kenneth Schiffer

Fifth Named Inventor's Signature:

Date of Execution of this Document by Fifth Named Inventor:

Date: _____

Fifth Named Inventor's Country of Citizenship:

United States of America

Fifth Named Inventor's Residence Address:

3608 Tallwood Court

Marietta, GA 30062

Fifth Named Inventor's Post Office Address:

Same as Residence Address

Sixth Named Inventor's Full Name:

Susan Elaine Shawver

Sixth Named Inventor's Signature:

Date of Execution of this Document by Sixth Named Inventor:

Date: _____

Sixth Named Inventor's Country of Citizenship:

United States of America

Sixth Named Inventor's Residence Address:

2010 Pearwood Path

Roswell, GA 30076

Sixth Named Inventor's Post Office Address:

Same as Residence Address

Seventh Named Inventor's Full Name:

Sandy Chi-Ching Ying

Seventh Named Inventor's Signature:

Date of Execution of this Document by Seventh Named Inventor:

Date: _____

Seventh Named Inventor's Country of Citizenship:

United States of America

Seventh Named Inventor's Residence Address:

166 Willow Stream Court

Roswell, GA 30076

Seventh Named Inventor's Post Office Address:

Same as Residence Address

EXPRESS MAIL CERTIFICATE

"Express Mail" label number: EL439720392US

Date of Deposit: October 12, 2000

I, Douglas H. Tulley, Jr., hereby certify that this document is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 C.F.R. 1.10 on the date indicated above and is addressed to the Assistant Commissioner for Patents, Box Patent Application, Washington, D.C. 20231.

By:

Donald T. Miller

Douglas H. Tulley, Jr.

10/12/00

[illegible]